

Kathrein ARU 3000 antenna reader family is the next generation of RAIN RFID readers with an integrated 65° wide-range antenna. It is the first choice for professional IoT solutions, such as industrial automation and vehicle identification in ruggedised environments. Its best-in-class 33-dBm UHF RF unit, optional connectivity modules, e.g. PoE+, Wi-Fi, 3G mobile interface and the powerful scalable processing unit change the way identification works.

Based on the latest RFID standards, such as EPC Gen2v2/ISO 18000-63, Kathrein ARU 3000 series support all market-leading transponder chip features for



> Features

Type	ARU 3400	ARU 3500	ARU 3560	ARU 3570
ETSI, order number	52010291	52010292	52010293	52010294
FCC, order number	52010299	52010300	52010301	52010302
Basic computing module			✓	
Dual-core embedded PC			✓	
Ethernet ports	1		2	
GPIO			✓	
PoE+			✓	
LED visualisation			✓	
Wi-Fi			✓	
Bluetooth			✓	
2G/3G				✓
Polarisation-switch antenna			✓	

> Accessories, optional

- RRU/ARU connecting cable DC 10 m or 3 m (order no. 52010358 or 52010359)
- RRU/ARU connecting cable Ethernet 10 m or 3 m (order no. 52010360 or 52010361)
- RRU/ARU connecting cable GPIO 10 m or 3 m (order no. 52010362 or 52010363)
- RRU/ARU connecting cable Ethernet bridge (order no. 52010373)
- RRU/ARU AC/DC Adapter 90 W or 30 W or 90 W (order no. 52010364 or 52010365 or 52010366)
- RRU/ARU power supply PoE+ Ethernet switch (order no. 52010369)
- RRU/ARU power supply PoE+ injector 30 W, 100 Mbit (order no. 52010370)
- Wall mount kit (order no. 52010351)
- Wall mount kit for RRU/ARU, WIRA 70 (order no. 52010261)
- Vandalism protective cover (order no. 52010367)
- RRU/ARU protective caps (order no. 52010376)


> General Specifications

RFID UHF Reader Overview		ETSI Version		FCC Version	
		ARU 34xx	ARU 35xx	ARU 34xx	ARU 35xx
RFID					
Frequency range	[MHz]	865 - 868		902 - 928	
Impedance antenna port	[Ohm]	50			
Max. TX power conducted	[dBm]	30	33	30	30 (33 dBm with extended cable length)
Emitted output power (max.) int. antenna	[ERP (ETSI)/ EIRP (FCC)]	33		36	
RX sensitivity	[dBm]	typ. -80			
Number of antenna ports	[R-TNC]	3			
Standards		EN302208-2 V2.1.1, EN301489-3, EN50364, EN62368-1, EN60529, EPC Gen2 V2, UCODE DNA		FCC Part15, UL, IC, EPC Gen2 V2, UCODE DNA	
Antenna integration					
Half-power beam width	[°]	65			
Gain, linear	[dBi]		ARU 3560 = 7.0		ARU 3560 = 7.0
Gain, circular	[dBic]	ARU 3400 = 8.5	ARU 3500 = 8.5 ARU 3560 = 6.5 ARU 3570 = 7.0	ARU 3400 = 8.5	ARU 3500 = 8.5 ARU 3560 = 6.5 ARU 3570 = 7.0
Voltage					
Local supply	[VDC]	+10 to +30			
Connector		M12, A-coded, 4-pole			
Remote feed	[VDC]	PoE+ according to 802.3at (35-57)			
		<ul style="list-style-type: none"> ▶ Make sure that the router/switch supports 30 W in the static mode. ▶ Use the cable the length of which does not exceed 100 m. ▶ Make sure to use a Cat 6 cable or a higher level cable. ▶ Note that the internal supply of GPIO-VCC-pin is not possible with PoE+. 			
Connector		M12, X-coded, 8-pole, port 1 only			
Power consumption					
Local supply	[W]	20	25.4	20	25.4
Remote feed	[W]	20	25.4	20	25.4
GPIO					
Max. input voltage	[V]	30			
Max. output voltage	[V]	30			
Max. current per output port	[mA]	500			
Max. current over all outputs	[mA]	1500			
Connector		M12, A-coded, 12-pole			
RFID controller					
Processor		ARMv7-A based processor with 600 MHz			
Flash memory eMMC	[Gbyte]	4			
RAM DDR2	[Mbyte]	128			
Operating system		Linux			
Mechanical properties					
Weight	[kg]	4.00		4.00	
Degree of protection		IP67			
Operating temperature range	[°C]	-20 to +55			
Storage temperature range	[°C]	-40 to +85			
Dimensions (L x W x H)	[mm]	300 x 300 x 71			

> General Specifications

RFID UHF Reader Overview		ETSI Version				FCC Version			
		ARU 3400	ARU 3500	ARU 3560	ARU 3570	ARU 3400	ARU 3500	ARU 3560	ARU 3570
Order number		52010291	52010292	52010293	52010294	52010299	52010300	52010301	52010302
Embedded PC									
Processor	ARMv7-A based processor, 2 cores @ 800 MHz								
Flash memory (eMMC)	8 [Gbyte]			✓				✓	
RAM DDR3	1 [Gbyte]								
Operating system	Linux								
Ethernet									
Number of Ethernet ports		1		2		1		2	
Data rate	10/100 [Mbit/s]								
Connector		M12, X-coded, 8-pole							
4 LED visualisation									
Freely programmable		basic LED		high-end LED		basic LED		high-end LED	
Wi-Fi									
Supported standards	a, b, g, n								
2.5 GHz band	2.412–2.484 [GHz]								
Max. TX power (dependent on country)	max. 17.3 [dBm]			✓				✓	
5 GHz band	4.910–5.825 [GHz]								
Max. TX power (dependent on country)	max. 18 [dBm]								
Max. channel bandwidth	max. 40 [MHz]								
Bluetooth									
Frequency range	2.402–2.480 [GHz]			✓				✓	
Max. TX power	[dBm]			11.7				11.7	
2G/3G									
Frequency range GSM/ GPRS/ EDGE	850/ 900/ 1800/ 1900 [MHz]								
Frequency range UMTS/ HSPA	800/ 850/ 900/ 1900/ 2100 [MHz]				✓				✓
Max. TX power (dependent on class and modulation)	33 [dBm]								

> Dimensions [mm]

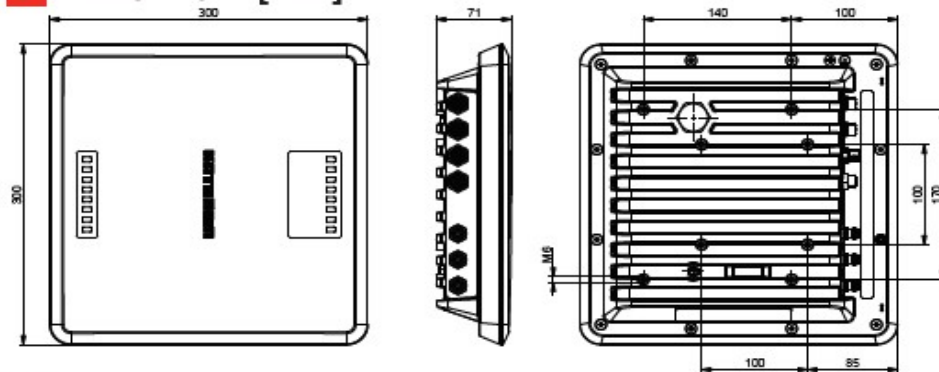


> Note

Risk of material damage!

- ▶ Make sure that the depth at which the screws are put into the housing of the reader does not exceed 10 mm (the tightening torque is 5 Nm).

> Power Supply

M12, A-coded, 4-pin, male




Pinout Power Supply

Pin	Allocation
1	+24 V DC
2	GND
3	GND
4	+24 V DC

> Ethernet

M12, X-coded, 8-pin, female



Pinout communication PoE+


Pin	Allocation
1	TX+ / PoE+1
2	TX- / PoE+1
3	RX+ / PoE+2
4	RX- / PoE+2
5	PoE+1
6	PoE+1
7	PoE+2
8	PoE+2

Pinout communication LAN

Pin	Allocation
1	TX+
2	TX-
3	RX+
4	RX-
5	
6	
7	
8	

> GPIO

M12, A-coded, 12-pin, female

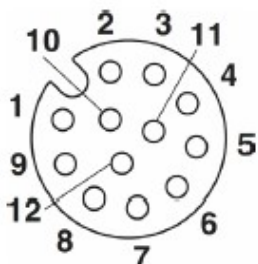

Pinout general purpose input output

Pin	Allocation
1	OUT_CMN
2	OUTPUT_1
3	INPUT_3
4	INPUT_CMN
5	INPUT_1
6	GND
7	UB
8	OUTPUT_4
9	OUTPUT_3
10	OUTPUT_2
11	INPUT_2
12	INPUT_4

[arfidex GmbH](http://www.arfidex.de) | Adlerstraße 2 | D-63322 Rödermark | Germany | Phone: +49 (0) 6074 861930

www.arfidex.de | info@arfidex.de

© arfidex makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does arfidex assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by arfidex have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by arfidex. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by arfidex hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. arfidex does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to arfidex, and arfidex reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

Rev. 01